


# STAINLESS STEEL REBAR & ACCESSORIES

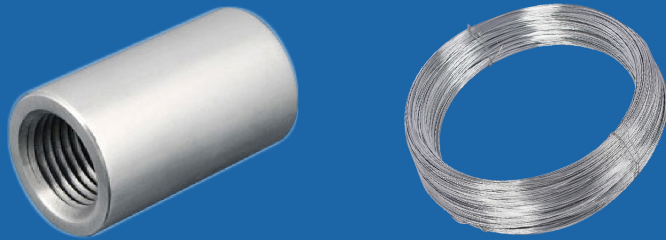

FUSTEEL

Steel material	EN: 1.4436, 1.4362, 1.4462 UNS: S31603, S32304, S32205
Standard	BS 6744 ASTM A955/A955M GB/T 33959
Diameter	8mm - 50mm

UNS	ASTM	EU Norm	Corrosion Resistance		
			PREn	CPT	CCTL
S31603	316LN	1.4436	25	≈75°F	≈5.3%
S32304	2304	1.4362	26	≈73°F	≈6.5%
S32205	2205	1.4462	35	≈125°F	> 10%

Diameter (mm)	8	10	12	14	16	18	20	22	25	28	32	36	40	50	
Weight (kg/m)	1.4436 (316LN)	0.40	0.63	0.91	1.23	1.61	2.04	2.51	3.04	3.93	4.93	6.43	8.14	10.05	15.71
	1.4362 (S32304)	0.39	0.61	0.88	1.20	1.57	1.98	2.45	2.96	3.83	4.80	6.27	7.94	9.85	15.30
	1.4462 (S32205)	0.39	0.61	0.88	1.20	1.57	1.98	2.45	2.96	3.83	4.80	6.27	7.94	9.85	15.30

## Available:

- CARES certified stainless steel rebar
- Stainless Steel Binding Wire
- Stainless steel coupler

